



82.8452.97.3 (13 sezioni/sections)

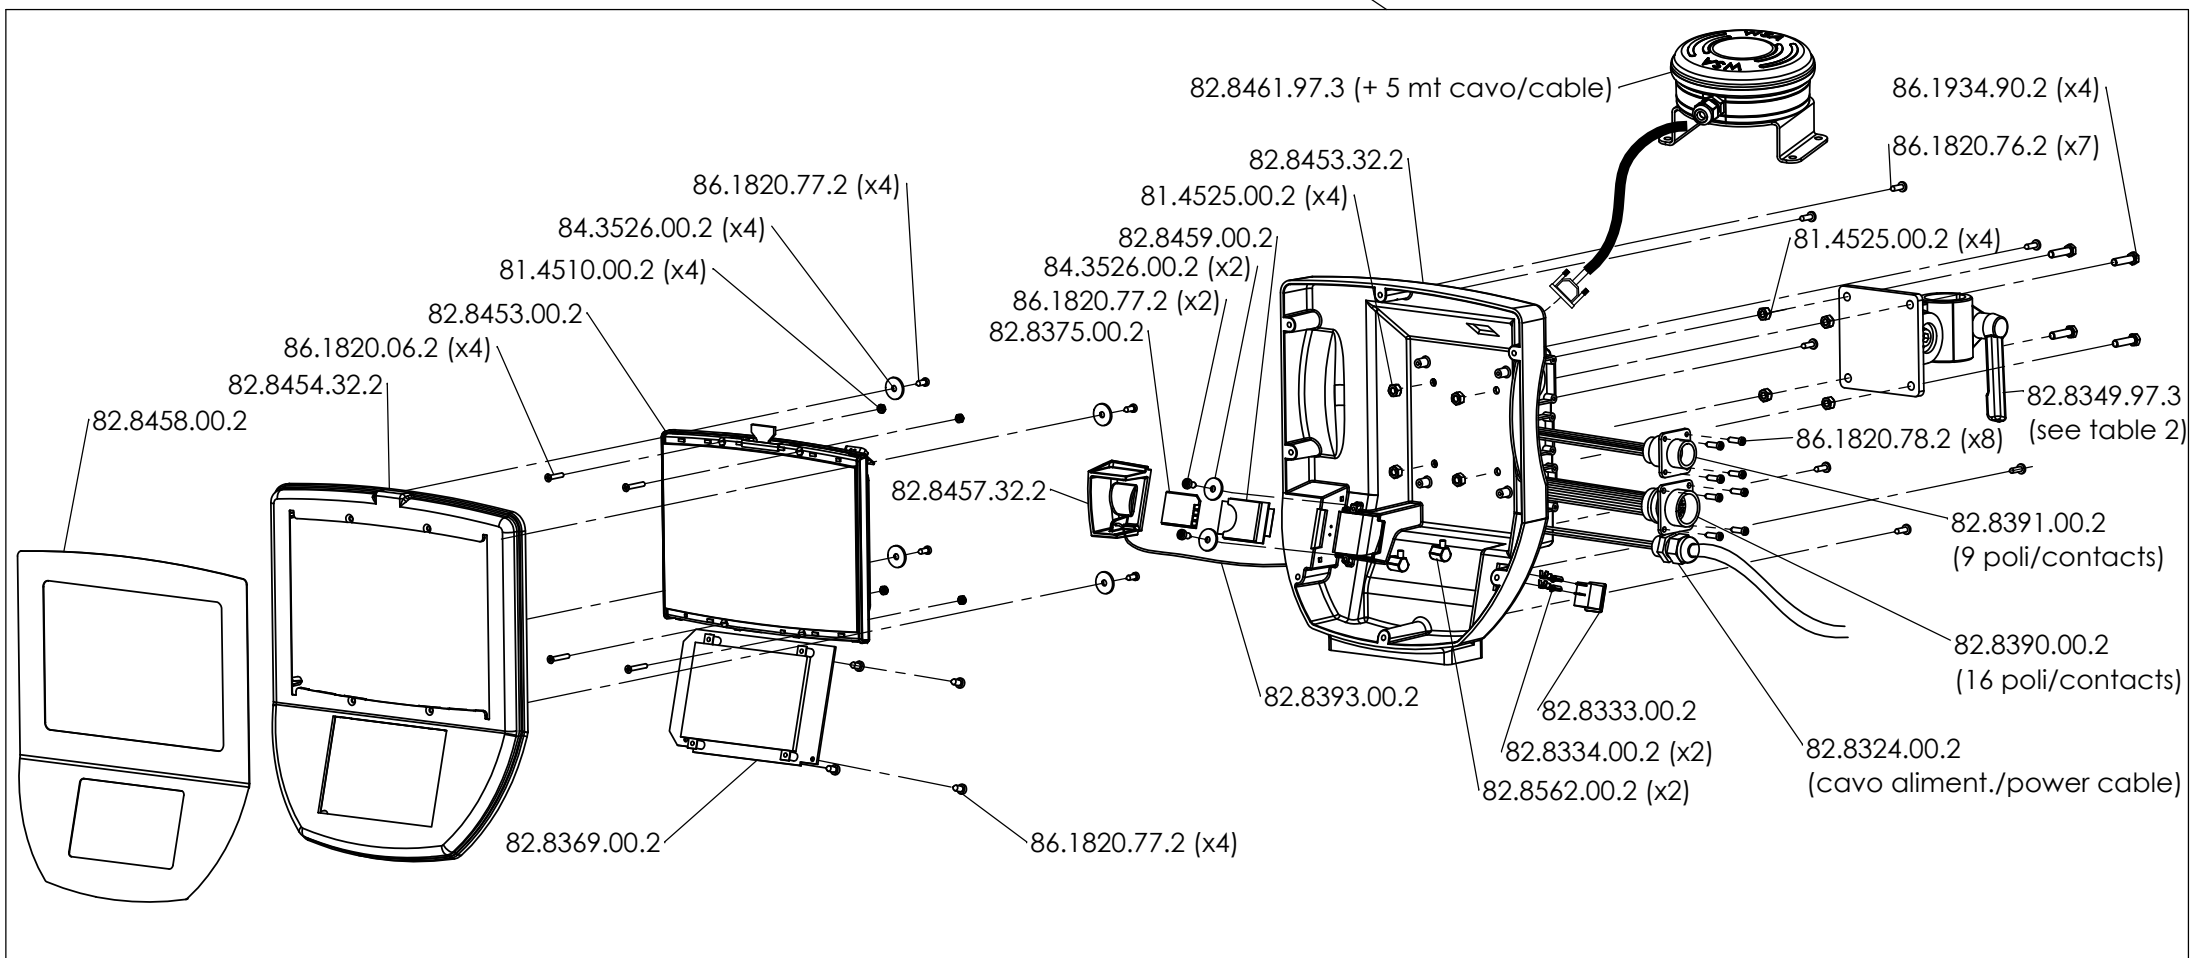


VERSIONI/VERSION: 82.8349.97.3 Kit staffa 4 fori / Bracket kit 4 holes

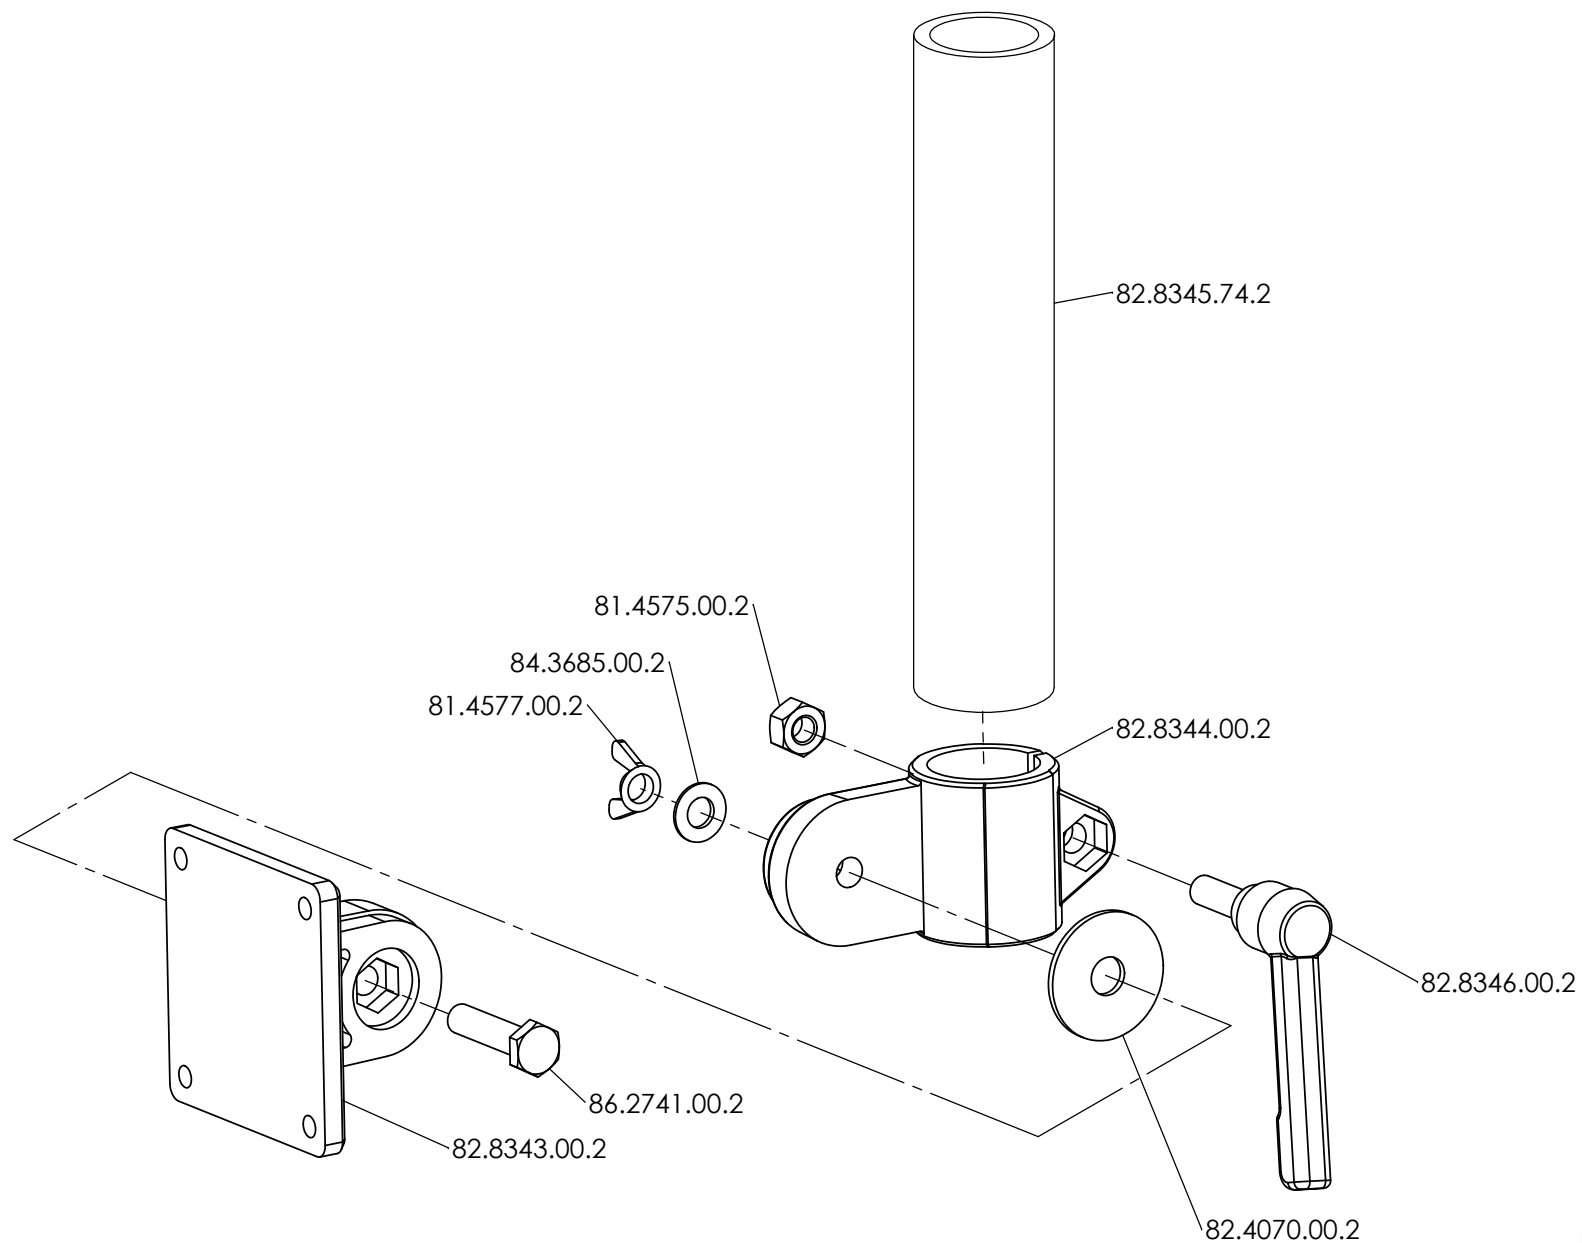

Componenti di completamento: Cavi / Complementary components: Cables

Cavi valvole standard (VG-VV-Sez.) Standard valves cables (VG-VV-Sec.)				
N° Sez./Sec.	Codice/Code	Lungh./Lenght A (mt)	Lungh./Lenght B (mt)	Lungh./Lenght tot. (mt)
5	82.8107.10.2B	3	1	4
7	82.8155.00.2B			
9	82.8495.00.2B			
11	82.8496.00.2B			
13	82.8497.00.2B	7		8
5	82.8547.00.2B			
7	82.8159.00.2B			
		9		10

Cavi 2 sensori 2 sensors cables				
N° Sez./Sec.	Codice/Code	Lungh./Lenght C (mt)	Lungh./Lenght D (mt) (portata/flow)	Lungh./Lenght E (mt) (pres./pressure)
2	82.8304.00.2	4	1.5	1.5
2	82.8548.00.2	8	1.5	1.5

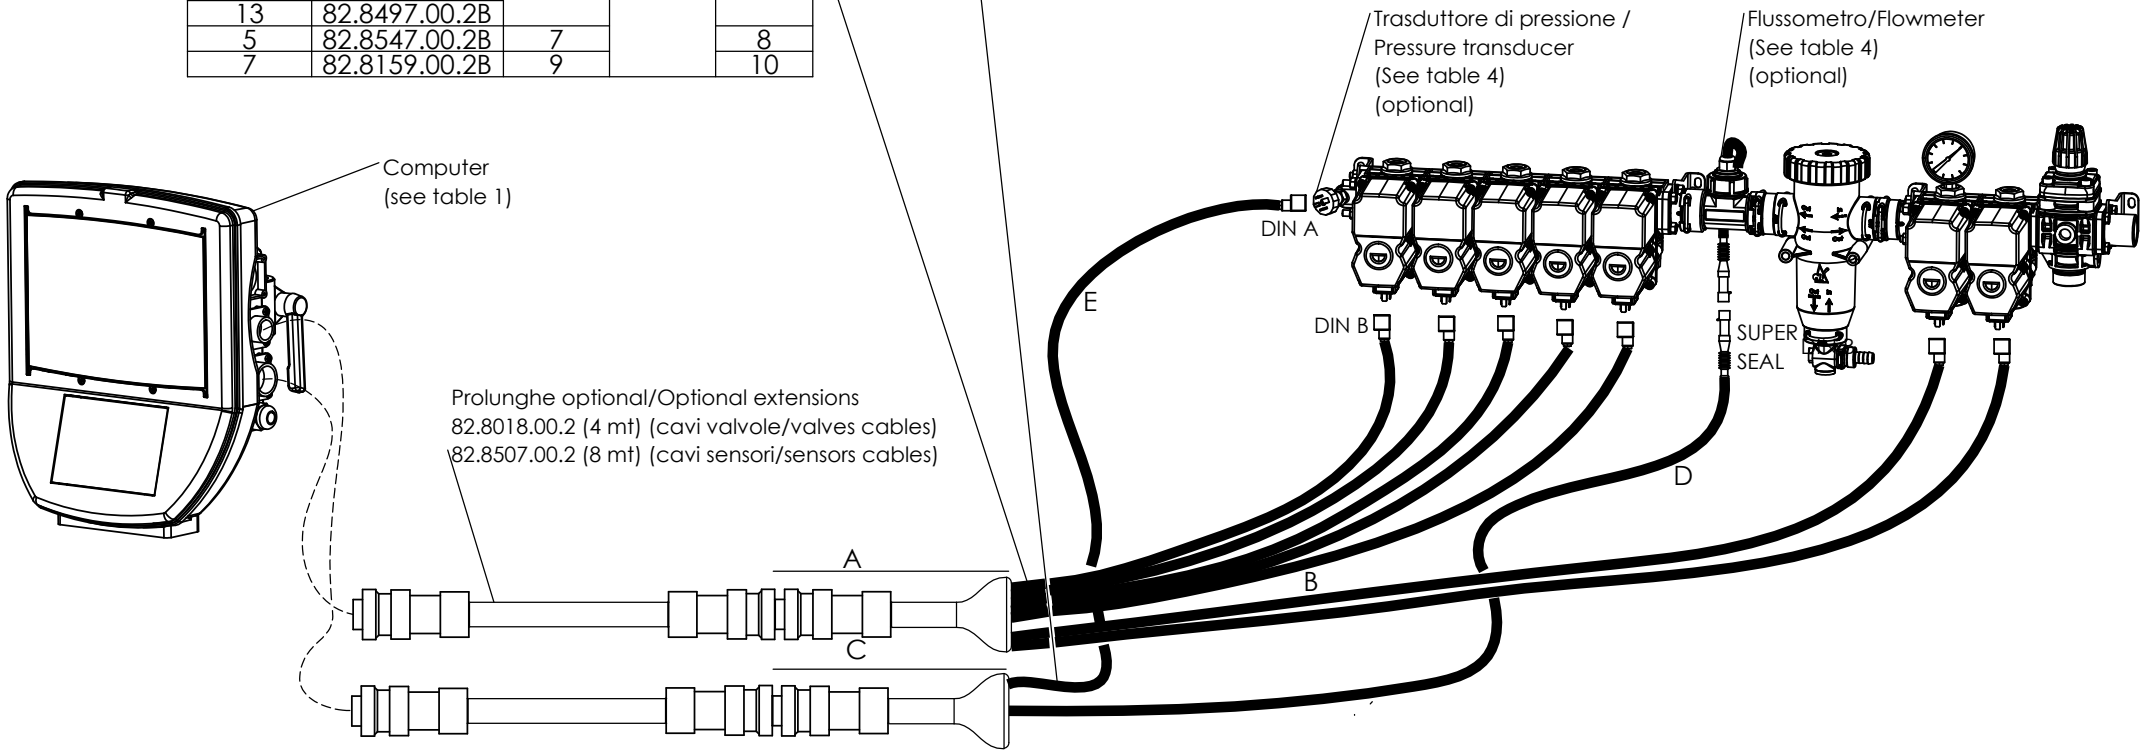

N° Sez./Sec.	Codice/Cod e	Lungh./ Lenght A (mt)	Lungh./ Lenght B (mt) (portata/ flow)	Lungh./ Lenght C (mt) (pressione / pressure)	Lung./ Lenght D (mt) (olio/ hydraulic)	Lungh./ Lenght E (mt) (livello/ level)	Lungh./ Lenght F (mt) (giri/ RPM)
5	82.8308.00.2	3	1.5	1.5	3	3	3

DIN A

A turbina / Turbine
82.8500.97.3T5 (10-100 l/min, 20 bar, T5)
82.8509.97.3 (10-100 l/min, 50 bar, G 3/4")
82.8501.97.3T5 (35-350 l/min, 20 bar, T5)

Elettromagnetico / Electromagnetic
 82.8502.97.3T5 (10-200 l/min, 20 bar, T5)
 82.8300.97.3 (30-60 l/min, 50 bar, G 3/4")
 82.8299.97.3 (30-60 l/min, 50 bar, G 1")

SUPER
SEAL

M12

品

Componenti di completamento: Optional / Complementary components: Optionals extra

Cavi valvole speciali a doppia lunghezza (VG-VV-Sez.)
 Special valves cables with double lenght (VG-VV-Sec.)

N° Sez./Sec.	Codice/Code	Lungh./ Lenght A (mt)	Lungh./ Lenght B- D (mt)	Lungh./ Lenght C (mt)	Lungh./ Lenght tot. (mt)
5	82.8160.00.2B	4	1	5	5-10
7	82.8162.00.2B				
7	82.8163.00.2B			6	5-11
9	82.8164.00.2B				

